

建第08024号
下井西（1）地区1 4号農道・水路改修工事

数 量 計 算 書

数 量 総 括 表						
工 種	種 別	名 称	規 格	単位	数 量	備 考
土工	片切掘削	94KH		m ³	2.6	
	床掘	14K		m ³	88.8	
	埋戻し	B4-D		m ³	19.7	
		B4		m ³	4.2	
	床均し	T		m ²	59.7	
	路床盛土	BV3		m ³	33.7	
		BV4		m ³	24.4	
	路体盛土	BV8		m ³	5.0	
	表土剥ぎ取り			m ³	18.2	
	残土処分			m ³	105.4	
	土砂運搬	岸本～現場		m ³	92.0	
	積込	土砂		m ³	92.0	
擁壁工		1号擁壁		m	52.1	
		1号境界壁		m	24.3	
水路工		1号水路		m	36.4	
舗装工		密粒度アスコン	t=40	m2	392.2	
		粒度調整碎石	T=100	m2	392.2	
仮設工	工事用道路工	敷鉄板	設置・撤去	m2	156	
		敷鉄板賃料	22*1548*3048	枚	35	0.802t/枚
				t	28.1	
	水替工	ポンプ設置・撤去	口径50mm	箇所	1.0	
		ポンプ運転	常時排水	日	35	

第 表

土工総括表				
名 称	規 格	単位	数 量	摘 要
片切掘削				
94KH	土砂	m3	2.6	
床掘				
14K	土砂	m3	88.8	
埋戻し				
B4-D	土砂	m3	19.7	
B4	土砂	m3	4.2	
床均し				
T		m2	59.7	
路床盛土				
BV3		m3	33.7	
BV4		m3	24.4	
路体盛土				
BV8		m3	5.0	
表土剥ぎ取り		m3	18.2	
残土処分	2.6+88.8+ (18.2-4.2)	m3	105.4	
土砂運搬	(19.7+33.7+24.4+5) /0.9	m3	92.0	
積込	(19.7+33.7+24.4+5) /0.9	m3	92.0	

土工(本線)

測点	区間距離	94KH 片切掘削（土砂）			14K 床掘（土砂）			B4-D 埋戻し（土砂）			B4 埋戻し（土砂）			T 床均し		
		断面積	平均断面	立積	断面積	平均断面	立積	断面積	平均断面	立積	断面積	平均断面	立積	断面積	平均断面	面 積
SP-2(N0. 3+4. 105)					1. 1			0. 3			0. 08			1. 0		
N0. 4	15. 895				1. 1	1. 10	17. 5	0. 3	0. 30	4. 8	0. 08	0. 08	1. 3	1. 0	1. 00	15. 9
N0. 4+7. 05		0. 0			0. 2			0. 07			0. 04			0. 2		
N0. 5	12. 950	0. 4	0. 20	2. 6	2. 2	1. 20	15. 5	0. 4	0. 24	3. 1	0. 1	0. 07	0. 9	1. 0	0. 60	7. 8
N0. 6	20. 000				1. 3	1. 75	35. 0	0. 3	0. 35	7. 0	0. 04	0. 07	1. 4	1. 0	1. 00	20. 0
N0. 6+16	16. 000				1. 3	1. 30	20. 8	0. 3	0. 30	4. 8	0. 04	0. 04	0. 6	1. 0	1. 00	16. 0
合　計	64. 8			2. 6			88. 8			19. 7			4. 2			59. 7

土工(本線)

測点	区間距離	BV3 路床盛土			BV4 路床盛土			BV8 路体盛土			表土剥ぎ取り			断面面積	平均断面	面	積
		断面積	平均断面	立積	断面積	平均断面	立積	断面積	平均断面	立積	断面積	平均断面	立積				
SP-2 (NO. 3+4. 105)		0.8			0.3			0.08			0.4						
NO. 4	15.895	0.8	0.80	12.7	0.3	0.30	4.8	0.08	0.08	1.3	0.4	0.40	6.4				
NO. 4+7. 05		0.0			0.0			0.0			0.0						
NO. 5	12.950	0.8	0.40	5.2	0.4	0.20	2.6	0.1	0.05	0.6	0.4	0.20	2.6				
NO. 6	20.000	0.3	0.55	11.0	0.5	0.45	9.0	0.08	0.09	1.8	0.2	0.30	6.0				
NO. 6+16	16.000	0.3	0.30	4.8	0.5	0.50	8.0	0.08	0.08	1.3	0.2	0.20	3.2				
合 計	64.8			33.7			24.4			5.0			18.2				

第 表


[illegible]

[illegible]

天端幅	前面勾配	背面勾配
0.30	0.00	0.40

測点	擁壁高	断面数量					
	H	コンクリート	前面型枠	背面型枠	基礎碎石	目地材	側面面積
NO. 3+3.94(SP-2)	1.15	0.61	1.15	1.24	0.96	0.06	
NO. 3+5.75(EC-2)	1.15	0.61	1.15	1.24	0.96	0.06	2.08
NO. 4	1.15	0.61	1.15	1.24	0.96	0.06	16.42
NO. 5	1.15	0.61	1.15	1.24	0.96	0.06	0.00
NO. 5+10	1.15	0.61	1.15	1.24	0.96	0.06	5.75
NO. 6	1.15	0.61	1.15	1.24	0.96	0.06	11.50
NO. 6+16	1.15	0.61	1.15	1.24	0.96	0.06	18.40
						計	54.15

右側擁壁平均H= 1.04

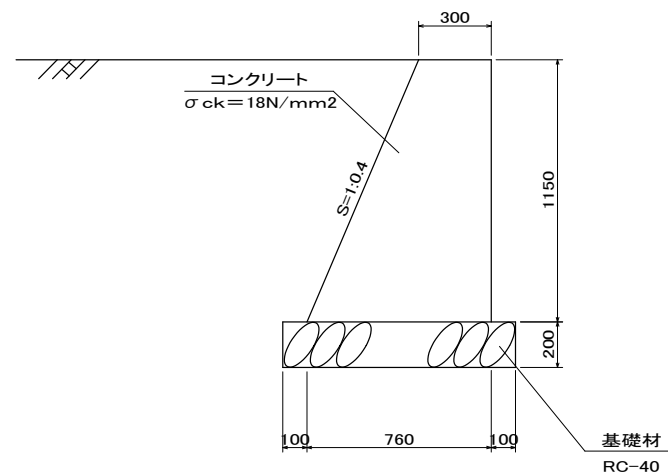

1号擁壁（右側）

測点	区間距離	コンクリート			型枠（前面）			型枠（背面）			基礎砕石			目地材		
		断面積	平均断面	立積	辺長	平均辺長	面積	辺長	平均辺長	面積	幅	平均幅	面積	断面積	平均断面	面積
NO. 3+3. 94 (SP-2)		0. 61			1. 15			1. 24			0. 96					
NO. 3+5. 75 (EC-2)	1. 81	0. 61	0. 610	1. 10	1. 15	1. 150	2. 08	1. 24	1. 240	2. 24	0. 96	0. 960	1. 74			
NO. 4	14. 28	0. 61	0. 610	8. 71	1. 15	1. 150	16. 42	1. 24	1. 240	17. 71	0. 96	0. 960	13. 71			
NO. 5		0. 61			1. 15			1. 24			0. 96					
NO. 5+10	10. 00	0. 61	0. 610	6. 10	1. 15	1. 150	11. 50	1. 24	1. 240	12. 40	0. 96	0. 960	9. 60			
NO. 6	10. 00	0. 61	0. 610	6. 10	1. 15	1. 150	11. 50	1. 24	1. 240	12. 40	0. 96	0. 960	9. 60			
NO. 6+16	16. 00	0. 61	0. 610	9. 76	1. 15	1. 150	18. 40	1. 24	1. 240	19. 84	0. 96	0. 960	15. 36			
														31. 77 /10 =		3. 18
合計	52. 09			31. 77			59. 90			64. 59			50. 01			3. 18

境界壁集計表

[illegible]

1号境界壁


擁壁形状

天端幅		
0.15		

断面数量表

[illegible]

境界壁形状

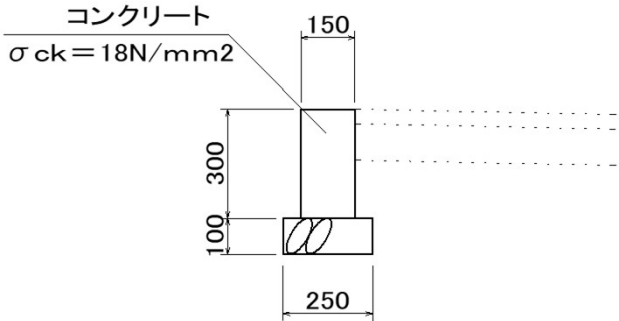

1号境界壁

[illegible]

第 表

[illegible]

水路集計表

[illegible]

1号水路


水路形状

壁厚	底版幅	底版高
0.15	0.45	0.15

断面数量表

[illegible]

水路形状

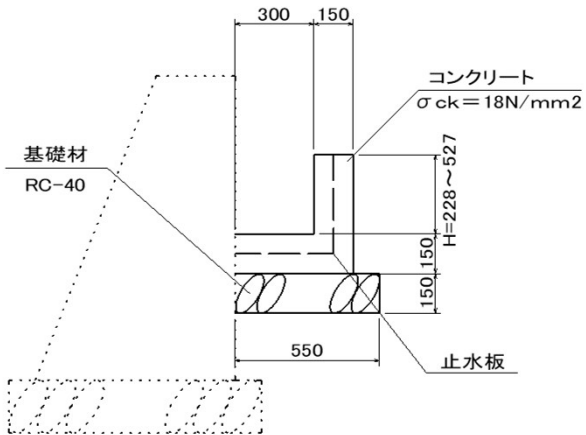

1号水路

[illegible]

第 表

[illegible]

舗装工集計表

[illegible]

アスファルト舗装

断面数量表							
測 点	幅	断面数量					
	W	表層	路盤				
NO. 3+4. 105	2. 00	2. 00	2. 00				
NO. 3+5. 67	2. 00	2. 00	2. 00				
NO. 4	2. 00	2. 00	2. 00				
NO. 4+7. 05	2. 00	2. 00	2. 00				
NO. 5	4. 00	4. 00	4. 00				
NO. 6	4. 00	4. 00	4. 00				
NO. 6+15. 87	4. 00	4. 00	4. 00				
NO. 6+16. 88	4. 00	4. 00	4. 00				
NO. 7	4. 00	4. 00	4. 00				
NO. 8	4. 00	4. 00	4. 00				
NO. 8+4. 32	4. 00	4. 00	4. 00				
NO. 8+5. 41	2. 00	2. 00	2. 00				
NO. 9	2. 00	2. 00	2. 00				
NO. 9+16. 91	2. 00	2. 00	2. 00				
NO. 10+2. 19	0. 000	0. 00	0. 00				

アスファルト舗装形状

