

建 第08072号

下井中地区12号水路改修工事

数 量 計 算 書

NO. 1

[illegible]

12号水路土工数量計算書

測 点 名	単 距 離	床掘(表土)			床掘(土砂)			埋戻(表土)			備 考
		断 面	平均断面	立 積	断 面	平均断面	立 積	断 面	平均断面	立 積	
12-N0.0	0.000				0.9			0.1			
12-N0.1	20.000				1.1	1.000	20.0	0.1	0.100	2.0	
12-N0.2	20.000				1.1	1.100	22.0	0.1	0.100	2.0	
12-N0.3	20.000				1.1	1.100	22.0	0.1	0.100	2.0	
12-N0.4	20.000				1.1	1.100	22.0	0.1	0.100	2.0	
12-N0.5	20.000				1.0	1.050	21.0	0.1	0.100	2.0	
12-N0.6	20.000				1.3	1.150	23.0	0.1	0.100	2.0	
12-N0.7	20.000				1.2	1.250	25.0	0.1	0.100	2.0	
12-N0.8	20.000				1.1	1.150	23.0	0.1	0.100	2.0	
12-N0.9	20.000				0.9	1.000	20.0	0.1	0.100	2.0	
12-IP.8	12.544				1.0	0.950	11.9	0.1	0.100	1.3	
12-N0.10	7.456	0.1	0.050	0.4	0.7	0.850	6.3	0.1	0.100	0.7	
12-N0.11	20.000	0.1	0.100	2.0	0.7	0.700	14.0	0.1	0.100	2.0	
+9.42	9.420	0.1	0.100	0.9	0.7	0.700	6.6	0.1	0.100	0.9	
合計	229.420			3.3			236.8			22.9	

測 点 名	単 距 離	埋戻(土砂)			盛土(土砂)			法面整形(土羽)			備 考
		断 面	平均断面	立 積	断 面	平均断面	立 積	断 面	平均断面	面積	
12-N0.0	0.000	0.4			0.2			0.3			
12-N0.1	20.000	0.4	0.400	8.0	0.1	0.150	3.0	0.3	0.300	6.0	
12-N0.2	20.000	0.5	0.450	9.0	0.1	0.100	2.0	0.2	0.250	5.0	
12-N0.3	20.000	0.5	0.500	10.0	0.1	0.100	2.0		0.100	2.0	
12-N0.4	20.000	0.5	0.500	10.0	0.1	0.100	2.0				
12-N0.5	20.000	0.5	0.500	10.0	0.1	0.100	2.0	0.4	0.200	4.0	
12-N0.6	20.000	0.4	0.450	9.0	0.1	0.100	2.0		0.200	4.0	
12-N0.7	20.000	0.4	0.400	8.0	0.2	0.150	3.0	0.6	0.300	6.0	
12-N0.8	20.000	0.4	0.400	8.0	0.2	0.200	4.0	0.6	0.600	12.0	
12-N0.9	20.000	0.4	0.400	8.0	0.2	0.200	4.0	0.6	0.600	12.0	
12-IP.8	12.544	0.5	0.450	5.6	0.1	0.150	1.9	0.1	0.350	4.4	
12-N0.10	7.456	0.4	0.450	3.4	0.1	0.100	0.7	0.4	0.250	1.9	
12-N0.11	20.000	0.4	0.400	8.0	0.1	0.100	2.0	0.1	0.250	5.0	
+9.42	9.420	0.4	0.400	3.8	0.1	0.100	0.9	0.1	0.100	0.9	
合計	229.420			100.8			29.5			63.2	

12号水路土工数量計算書

測 点 名	単 距 離	床均し			コンクリート取壊し						備 考
		断 面	平均断面	面積	断 面	平均断面	立 積	断 面	平均断面	立 積	
12-NO. 0	0.000	1.1									
12-NO. 1	20.000	1.1	1.100	22.0							
12-NO. 2	20.000	1.1	1.100	22.0							
12-NO. 3	20.000	1.1	1.100	22.0							
12-NO. 4	20.000	1.1	1.100	22.0							
12-NO. 5	20.000	1.1	1.100	22.0							
12-NO. 6	20.000	1.1	1.100	22.0							
12-NO. 7	20.000	1.1	1.100	22.0							
12-NO. 8	20.000	1.1	1.100	22.0							
12-NO. 9	20.000	1.1	1.100	22.0							
12-IP. 8	12.544	1.1	1.100	13.8	0.1	0.050	0.6				
12-NO. 10	7.456	1.1	1.100	8.2	0.1	0.100	0.7				
12-NO. 11	20.000	1.1	1.100	22.0	0.1	0.100	2.0				
+9.42	9.420	1.1	1.100	10.4	0.1	0.100	0.9				
合計	229.420			252.4			4.2				

[illegible]

1.0式当り

[illegible]

[illegible]

1.0箇所当り

[illegible]

[illegible]

U型水路工 延長調書

設	置	区	間	区間長 (m)			
12-N0. 0	~	12-N0. 11+9. 42		229. 42			
延長				229. 42			

U型水路工 鋼製蓋 延長調書

設	置	区	間	区間長 (m)			
12-N0. 9+11. 75	~	12-N0. 9+15. 75		4. 00			
延長				4. 00			

U型水路工 数量計算書


現場打ち(幅600)										
測 点 名	単 距 離	H		コンクリート			型枠			備 考
		H1	H2	断 面	平均断面	立 積	断 面	平均断面	立 積	
12-N0.0	0.000	0.400	0.580	0.28			2.26			
12-N0.0+4.50	4.500	0.425	0.425	0.26	0.270	1.22	2.00	2.130	9.59	
12-N0.1	15.500	0.512	0.450	0.28	0.270	4.19	2.22	2.110	32.71	
12-IP.1	5.986	0.546	0.460	0.29	0.285	1.71	2.31	2.265	13.56	
同所	0.000	0.396	0.460	0.26	0.275		2.01	2.160		
12-N0.2	14.014	0.474	0.482	0.28	0.270	3.78	2.21	2.110	29.57	
12-IP.2	0.509	0.477	0.483	0.28	0.280	0.14	2.22	2.215	1.13	
12-N0.2+14.00	13.491	0.552	0.505	0.29	0.285	3.84	2.41	2.315	31.23	
同所	0.000	0.502	0.505	0.29	0.290		2.31	2.360		
12-N0.3	6.000	0.536	0.515	0.29	0.290	1.74	2.40	2.355	14.13	
12-IP.3	3.133	0.554	0.520	0.30	0.295	0.92	2.45	2.425	7.60	
12-IP.4	9.773	0.608	0.535	0.31	0.305	2.98	2.59	2.520	24.63	
同所	0.000	0.508	0.535	0.29	0.300		2.39	2.490		
12-N0.4	7.094	0.548	0.547	0.30	0.295	2.09	2.49	2.440	17.31	
12-IP.5	18.199	0.650	0.576	0.32	0.310	5.64	2.75	2.620	47.68	
12-N0.4+19.00	0.801	0.654	0.577	0.32	0.320	0.26	2.76	2.755	2.21	
同所	0.000	0.504	0.577	0.30	0.310		2.46	2.610		
12-N0.5	1.000	0.510	0.579	0.30	0.300	0.30	2.48	2.470	2.47	
12-IP.6	18.430	0.613	0.609	0.32	0.310	5.71	2.74	2.610	48.10	
同所	0.000	0.413	0.609	0.29	0.305		2.34	2.540		
12-IP.7	1.107	0.419	0.610	0.29	0.290	0.32	2.36	2.350	2.60	
12-N0.6	0.463	0.422	0.611	0.29	0.290	0.13	2.37	2.365	1.09	
12-N0.7	20.000	0.478	0.588	0.29	0.290	5.80	2.43	2.400	48.00	
12-N0.7+12.50	12.500	0.513	0.573	0.30	0.295	3.69	2.47	2.450	30.63	
同所	0.000	0.413	0.573	0.28	0.290		2.27	2.370		
12-N0.8	7.500	0.434	0.564	0.28	0.280	2.10	2.30	2.285	17.14	
12-N0.9	20.000	0.490	0.540	0.29	0.285	5.70	2.36	2.330	46.60	
12-IP.8	12.544	0.525	0.525	0.29	0.290	3.64	2.40	2.380	29.85	
12-IP.9	3.518	0.535	0.535	0.30	0.295	1.04	2.44	2.420	8.51	
同所	0.000	0.585	0.335	0.27	0.285		2.14	2.290		
12-IP.10	1.796	0.589	0.339	0.27	0.270	0.48	2.16	2.150	3.86	
12-N0.10	2.142	0.594	0.344	0.28	0.275	0.59	2.18	2.170	4.65	
12-IP.11	1.176	0.596	0.346	0.28	0.280	0.33	2.18	2.180	2.56	
12-IP.12	5.457	0.608	0.358	0.28	0.280	1.53	2.23	2.205	12.03	
12-IP.13	7.124	0.624	0.374	0.28	0.280	1.99	2.30	2.265	16.14	
12-N0.11	6.243	0.638	0.388	0.29	0.285	1.78	2.35	2.325	14.51	
12-N0.11+8.27	8.272	0.656	0.406	0.29	0.290	2.40	2.42	2.385	19.73	
12-N0.11+8.65	0.375	0.657	0.657	0.33	0.310	0.12	2.93	2.675	1.00	
12-N0.11+9.42	0.770	0.659	0.659	0.33	0.330	0.25	2.94	2.935	2.26	
合計	229.417					66.41			543.08	

U型水路工 数量計算書

現場打ち(幅600)										
測 点 名	単 距 離	H		目地材			止水板			備 考
		H1	H2	断 面	平均断面	立 積	断 面	平均断面	立 積	
12-N0.0	0.000	0.400	0.580	0.03			0.19			
12-N0.0+4.50	4.500	0.425	0.425	0.03	0.030	0.14	0.18	0.185	0.83	
12-N0.1	15.500	0.512	0.450	0.03	0.030	0.47	0.19	0.185	2.87	
12-IP.1	5.986	0.546	0.460	0.03	0.030	0.18	0.19	0.190	1.14	
同所	0.000	0.396	0.460	0.03	0.030		0.18	0.185		
12-N0.2	14.014	0.474	0.482	0.03	0.030	0.42	0.19	0.185	2.59	
12-IP.2	0.509	0.477	0.483	0.03	0.030	0.02	0.19	0.190	0.10	
12-N0.2+14.00	13.491	0.552	0.505	0.03	0.030	0.40	0.20	0.195	2.63	
同所	0.000	0.502	0.505	0.03	0.030		0.19	0.195		
12-N0.3	6.000	0.536	0.515	0.03	0.030	0.18	0.20	0.195	1.17	
12-IP.3	3.133	0.554	0.520	0.03	0.030	0.09	0.20	0.200	0.63	
12-IP.4	9.773	0.608	0.535	0.03	0.030	0.29	0.20	0.200	1.95	
同所	0.000	0.508	0.535	0.03	0.030		0.19	0.195		
12-N0.4	7.094	0.548	0.547	0.03	0.030	0.21	0.20	0.195	1.38	
12-IP.5	18.199	0.650	0.576	0.03	0.030	0.55	0.21	0.205	3.73	
12-N0.4+19.00	0.801	0.654	0.577	0.03	0.030	0.02	0.21	0.210	0.17	
同所	0.000	0.504	0.577	0.03	0.030		0.20	0.205		
12-N0.5	1.000	0.510	0.579	0.03	0.030	0.03	0.20	0.200	0.20	
12-IP.6	18.430	0.613	0.609	0.03	0.030	0.55	0.21	0.205	3.78	
同所	0.000	0.413	0.609	0.03	0.030		0.19	0.200		
12-IP.7	1.107	0.419	0.610	0.03	0.030	0.03	0.19	0.190	0.21	
12-N0.6	0.463	0.422	0.611	0.03	0.030	0.01	0.19	0.190	0.09	
12-N0.7	20.000	0.478	0.588	0.03	0.030	0.60	0.20	0.195	3.90	
12-N0.7+12.50	12.500	0.513	0.573	0.03	0.030	0.38	0.20	0.200	2.50	
同所	0.000	0.413	0.573	0.03	0.030		0.19	0.195		
12-N0.8	7.500	0.434	0.564	0.03	0.030	0.23	0.19	0.190	1.43	
12-N0.9	20.000	0.490	0.540	0.03	0.030	0.60	0.19	0.190	3.80	
12-IP.8	12.544	0.525	0.525	0.03	0.030	0.38	0.20	0.195	2.45	
12-IP.9	3.518	0.535	0.535	0.03	0.030	0.11	0.20	0.200	0.70	
同所	0.000	0.585	0.335	0.03	0.030		0.18	0.190		
12-IP.10	1.796	0.589	0.339	0.03	0.030	0.05	0.18	0.180	0.32	
12-N0.10	2.142	0.594	0.344	0.03	0.030	0.06	0.18	0.180	0.39	
12-IP.11	1.176	0.596	0.346	0.03	0.030	0.04	0.18	0.180	0.21	
12-IP.12	5.457	0.608	0.358	0.03	0.030	0.16	0.19	0.185	1.01	
12-IP.13	7.124	0.624	0.374	0.03	0.030	0.21	0.19	0.190	1.35	
12-N0.11	6.243	0.638	0.388	0.03	0.030	0.19	0.19	0.190	1.19	
12-N0.11+8.27	8.272	0.656	0.406	0.03	0.030	0.25	0.20	0.195	1.61	
12-N0.11+8.65	0.375	0.657	0.657	0.03	0.030	0.01	0.22	0.210	0.08	
12-N0.11+9.42	0.770	0.659	0.659	0.03	0.030	0.02	0.22	0.220	0.17	
合計	229.417					6.88			44.58	

U型水路工 数量計算書

1.0式当り

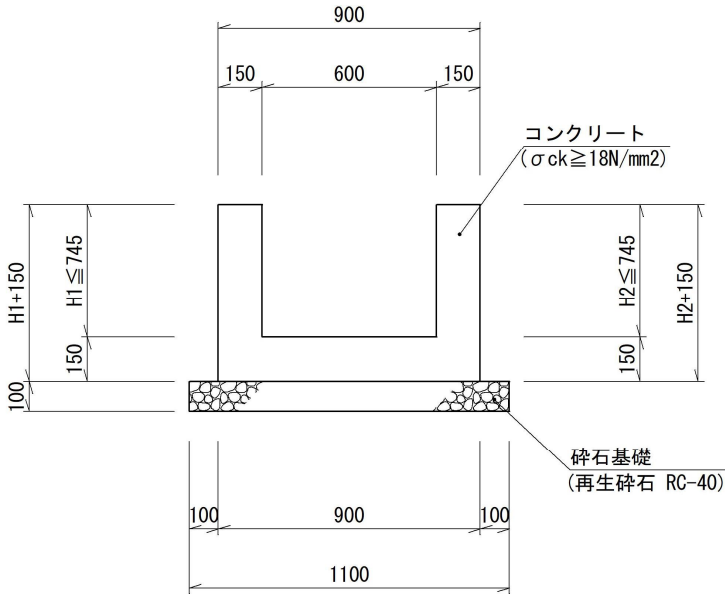

材料表 (10.0m当り)

名 称	規 格	単 位	数 量	摘 要
コ ン ク リ ー ト	$\sigma_{ck} \geq 18\text{N/mm}^2$	m ³	$(H_1+H_2+0.90) \times 1.50$	
型 枠	一般型枠	m ²	$(H_1+H_2+0.15) \times 20.00$	
砕 石 基 礎	再生碎石 (RC-40)	m ²	11.00	t=10cm
目 地 材	瀝青質板	m ²	$(H_1+H_2+0.90) \times 0.15$	t=10mm
止 水 板	FF150×5mm	m	$H_1+H_2+0.90$	
鋼 製 蓋	歩道用, 溝幅600用	枚	指定区間のみ	

種 別	規 格	算 式	単 位	数 量
コ ン ク リ ー ト	$\sigma_{ck} \geq 18\text{N/mm}^2$	$V = \text{次頁数量計算書より} = 66.41$ $V = (0.400 \times 0.270 + 0.590 \times 0.500) \div 2 \times 0.150 = 0.03$ $= 66.44$	m ³	66.44
型 枠	一般型枠	$A = \text{次頁数量計算書より} = 543.08$ $A = (0.400 \times 0.270 + 0.590 \times 0.500) \div 2 \times 4 = 0.81$ $= 543.89$	m ²	543.89
砕 石 基 礎	再生碎石 (RC-40)	$A = 1.100 \times 229.420$	m ²	252.36
目 地 材	瀝青質板	$A = \text{次頁数量計算書より}$	m ²	6.88
止 水 板	FF150×5mm	$L = \text{次頁数量計算書より}$	m	44.58
鋼 製 蓋	歩道用, 溝幅600用	$N = 4.00 \div 1.00$	枚	4.00

